

**WALTHER
STRONG®**




**IF YOU'RE A PROFESSIONAL
YOU'RE USING WALTHER STRONG**

beko® 

HYDRO-STOP



**MADE IN
GERMANY**

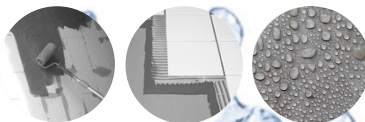

AVAILABLE IN -

**1 KG | BEKO 2371 001 EN
7 KG | BEKO 237 2 007 EN**

PAINT ON SINGLE-COMPONENT WATER SEALANT
**TESTED ACCORDING TO DIN 18195 - BRILLIANT FOR REPAIRING AND INSTALLING
ROOFING AREAS & WATERPROOFING WETROOMS.**

AVAILABLE IN STORE OR ONLINE



STEP 1



apply 1st coat of hydro-stop
- layer approx 2MM thick

STEP 2



let 1st coat fully dry / cure
(approx. 4 hours)

STEP 3



apply 2nd coat of hydro-stop
- layer approx 2MM thick

STEP 4



If using as tile adhesive
- set tiles into sealant before
2nd coating fully cures

STEP 5



Let fully cure for 24 hours before
coming in contact with moisture

Can be applied with -



DID YOU KNOW ?

Hydro-stop is a 2-in-1
tile adhesive & water sealant !

- Highly flexible single component sealant
- UV-weather & ageing resistant
- Can be used on damp mineral surfaces (concrete etc)
- Water-proofs roofing areas & wet rooms
- Foundation waterproof wall sealing acc. to DIN 18195
- Estimated usage per coat - 1 Kg per / metre squared
(when applied with 2MM thickness)