

ISO-ACOUSTIC TAPE

30MM - 90MM RANGE



30MM x 25M
WS-ACT30X25PR

50MM x 25M
WS-ACT50X25PR

70MM x 25M
WS-ACT70X25PR

90MM x 25M
WS-ACT90X25PR



DRAMATICALLY REDUCE NOISE & VIBRATIONS

WHEN SOUNDPROOFING GARDEN ROOMS, LOFT CONVERSIONS & ALL WALLS, FLOORS AND CEILINGS



EASY TO APPLY



HIGH STRENGTH



NOISE REDUCTION

YOUR NEAREST MERCHANT:



Walther Strong ISO-Acoustic Tape is a resilient, 4 mm thick self-adhesive isolation tape designed to dramatically reduce noise transfer and vibration in both residential and commercial builds. Fully trialled and tested, this specialist acoustic joint tape is ideal for use in loft conversions, garden rooms, music studios, and general construction, helping you meet Building Regulations Part E by reducing flanking noise across structures and party walls.

Engineered for performance and ease of use, ISO-Acoustic Tape adheres securely to timber, steel stud, and zinc joists, providing long lasting acoustic insulation in even the most demanding environments.

Note: Not suitable for high pressure or heavy load areas – for those applications, use Walther Strong HD ISO-Acoustic Tape for maximum durability and performance.


HOW TO APPLY - STEP BY STEP

1 - PREPARE SURFACE

[Remove all debris & dust so that the adhesive can stick to desired framework - a dry cloth is suitable]

2 - APPLY TAPE

[Apply evenly to the top of each joist ensuring there is no serious overlap]

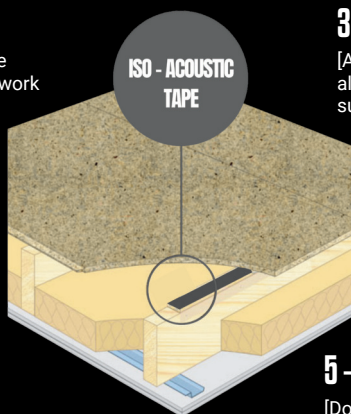

3 - PRESS FIRMLY

[Apply firm pressure along tape allowing the adhesive to bond to surface area]

4 - IF FRAMEWORK IS WET

[Staple/screw tape down as the framework dries the adhesive will bond to the surface]

5 - DON'T OVER-TIGHTEN SCREWS

[Don't counter sink screw heads]

"Cheaper and better quality than the stuff on Amazon. The adhesive is excellent and it worked a treat on the 100 year old suspended timber floor I used it on."

– Verified Installer

YOUR NEAREST MERCHANT: